


Mineral Insulated Thermocouples

Series T8 Stripped and Sealed Replacement Assembly

- Replacement probe for many designs.
- Available in .010" to .375" diameters
- Sealed with A.N.S.I. color-coded epoxy

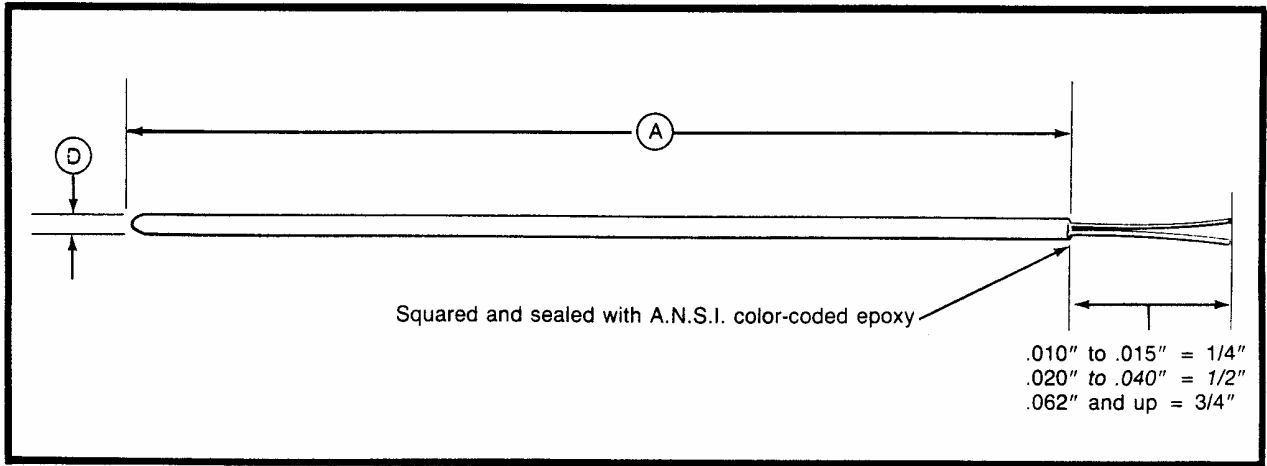

1	2	3	4	5	6	7	8
T8							

1. Style No. _____
2. Junction Type _____
Grounded Flat
Grounded
Ungrounded Flat
Ungrounded
Exposed
NG = Reduced tip, grounded (Specify O.D. x length)
NU = Reduced tip, ungrounded (Specify O.D. x length)
3. Sheath Diameter (D Dimension) _____
 Available in .010" to .375". Please specify.
4. Sheath Material¹ _____
304 s/s
316 s/s
310 s/s
Inconel 600
 (Specify other materials)
5. Calibration¹ _____
J, K, T, E, or N²
 Specify calibration symbol twice for dual, and specify P after calibration for special (premium) limits of error.
6. Insulation Material _____
MgO or Al₂O₃
7. Sheath Length (A Dimension) _____
 Specify in inches.
8. Options _____
 See section ASC for options.

¹See section AD for specifications and application data.

²NiSi/Nicrosil.

³Type T rated to 700°F